

level measurement

level switch PIU 472

features

- level switch for fluid types
- the ideal alternative unit for the swing level switch
- aseptic measuring point by process connection thread M12 for modular welded sleeve- and process connection system
- EHEDG-conform, food safe material
- **starting an adjustment by PC not necessary**
- definated position of screwing

technical specifications

- connection head made of stainless steel 1.4305
- food tangent level stick made with lamination PFA P16501
- process connection G1/2" modulare system
- electrical connection with screwing or optional M12-plug
- protection class IP69K
- auxiliary supply 12...35VDC
- output signal active, max 50mA, short-circuit proof
- switching function full/empty by polarity of auxiliary supply
- temperature range 0...140°C process temperature for 30min
- high temperature design with neck tube optional
- temperature rang connection head -20°C to +80°C
- max. operating pressure 10bar
- optional with switching status LED




PIU472-5-A-1

**new, the tuning fork
as a rod probe**

application areas

- fill level detection in cases and big pipelines
- dry running condition protection
- empty-/full announcement

**We make it „robust“!
sealed electronic**

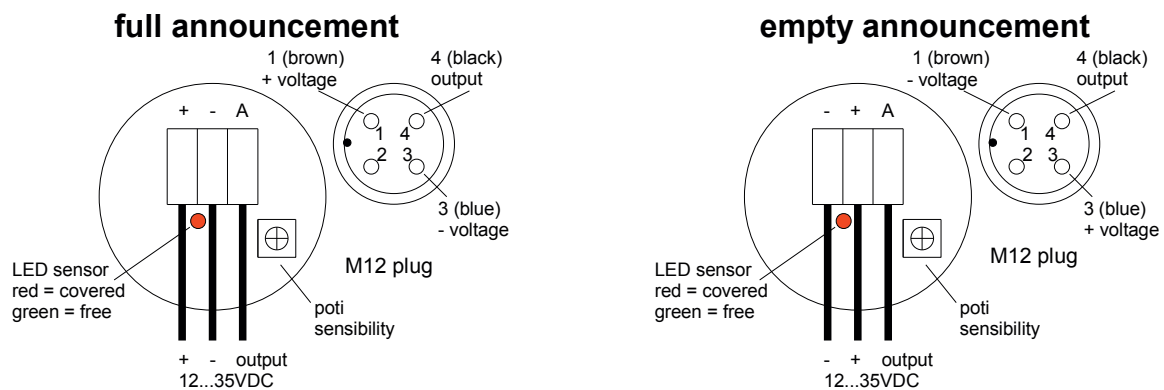

order-code PIU 472...

order example: PIU472-5-A-1

connection heads

- 5 stainless steel head standard with screwing
- 6 stainless steel head standard with M12-plug

design

- X switch-point at 19mm
- Y switch-point at 38mm
- A switch-point at 50mm
- B switch-point at 100mm
- C switch-point at 150mm
- D switch-point at 200mm

optional

- 1 standard design
- 2 with extern switching status LED

updated 01/2018