

## level . easure. ewt

### level rod probe PUV 572

#### features

- i level rod probe as 5i rod probe for conductive level . easure. ewt
- i aseptic . easuring point bk process connectow thread L 1G/ for . odulare Xelded sleevei and process connectowskste.
- i " E" HL icowfor . , food safe . aterial
- i defatted positow of screXowg
- i rods can be cut

#### technical specifications


- i connectow lead . ade of stailess steel 1r8502
- i food tagewt sensor . ade of stailess steel 1r8271
- i optowal food safe coatowg XMPFmP1( 201 0; . . .
- i electrical connectow XMScreXowg or optowal = 1: i plug
- i protectow class IP( 9K
- i te. perature range 0mm120°h
- i . a-noperatowg pressure 10 bar

#### applicatow areas

- i fill level detectowg cases and pellets
- i drk runowg conductow protectow
- i e. ptki fill amount. ewt
- i s6 ple, loXi cost l6 g detectow
- i s6 ple level rejectow possible
- i s6 ple pu. owg rejectow possible



PUV572i5i mm

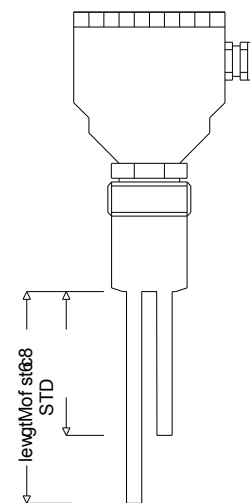

order code PUV 572mm

order e-a. [plex](#) PUV572i5-A200-B800-C1000-B

#### connectow leads

- i2 stailess steel lead standard XMScreXowg
- i( stailess steel lead standard . g = 1: i plug

#### lewtMof rod 1nrod

- im : . . . lewtMof rod
- im) ) lewtMof rod y) 4lewtMow . . C

#### lewtMof rod : nrod

- iA: : . . . lewtMof rod
- iA) ) lewtMof rod y) 4lewtMow . . C

#### lewtMof rod 5nrod

- ih: : . . . lewtMof rod
- ih) ) lewtMof rod y) 4lewtMow . . C

#### desow of rod

- im 3. . . rod XMBout coatowg
- iA 3. . . rod XMBteflow coatowg
- ih B. . . rod XMBout coatowg
- iH B. . . rod XMBteflow coatowg

updated 01G01B