

level measurement

level switch HIU 322

features

- level switch for allfluid types
- measuring principle oscillation fork
- robust design in a housing made of stainless steel
- definated position of the forks by indication on the outside
- compact design

technical specifications

- housing made of stainless steel 1.4305
- medium- tangent components (forks) made of stainless steel 1.4571
- process connection G1" screw-in thread
- electrical connection with plug ISO4400 or optional fixed cable connection
- protection class IP65K(with plug), IP68 with cable connection
- auxiliary supply 12...55 VDC, max. current 350 mA at 55 VDC
- auxiliary supply 20-255 VAC 50/60 Hz, max. current 350 mA
 - min. current 10 mA at 255 VAC
 - min. current 25 mA at 24 VAC
- switching function full/empty by polarity of auxiliary supply
- temperature range -40...+130°C
- max. operating pressure 6 bar, other types on request
- with switching status LED, bicolored





HIU322-A0-1-A-1-A

application ares


- fill level detection in cases and pipelines
- protection against dry running
- protection against overfilling
- empty-/full announcement

safety indication and connection chart cable device AC- design

attention: Never use the AC-devices without load !!

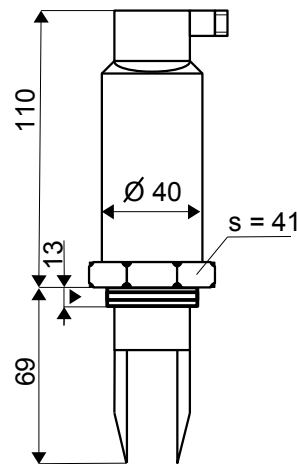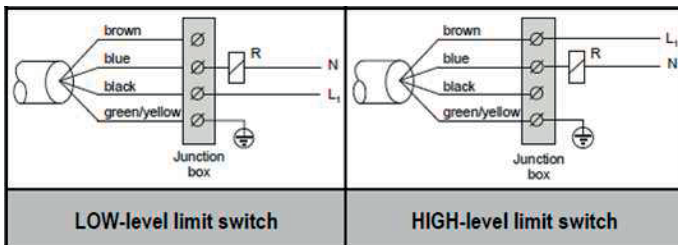

HIU322-A0-1-A...

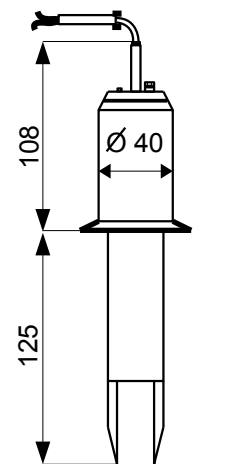

HIU322-A3-1-B...

order-code HIU 322...

order example: HIU322-A0-1-A-1-A

electrical connection

- A0 plug ISO4400
- A3 with fixed cable connection 3m
- A5 with fixed cable connection 5m
- AXX cable length on request, please specify length in meter

design of oscillation forks

- 1 stainless steel buffed

length of oscillation forks

- A short design (length of the forks 39 mm)
- B standard design (length incl. thread 126 mm)

process connection

- 1 G1" screw-in thread

output electronic system

- A 2-wire AC 20-255 standard design
- B 3-wire DC PNP/NPN, 12-55 VDC

updated 01/2018