

level measurement


level rod probe PUV 442

features

- level rod probe as 2-rod probe for conductive level measurement
- process connection thread G1"
- different plastic heads and cable connection possibilities available
- rods can be cut

technical specifications

- connection head made of plastic (different materials available)
- tangent sensor made of stainless steel 1.4571
- optional food safe coating with PFA P16501 0,2mm
- protection class IP68
- temperature range 0...60°C
- max. operating pressure 3 bar
- optional available with level module NA1 or NA2

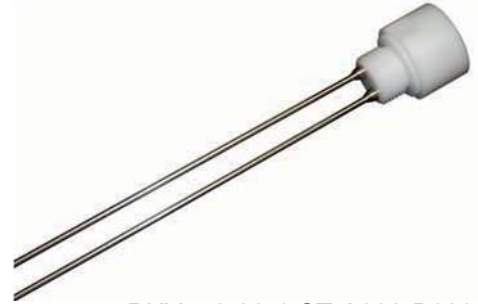

PUV442-22-1-ST-A200-B200-A

application areas

- fill level detection in cases and pipelines
- dry running condition protection
- empty-/full announcement
- simple, low-cost limit detection
- simple level rejection possible
- simple pumping rejection possible

order-code PUV 442...

order example: PUV442-22-05PVC-VG-A200-B200

connection heads and threads

- 22 plastic head material POM standard, process connection G1"

electrical connection

- 1 screwing M16
- 2 connector ISO4400
- 3 connector M12
- 00PVC specify length of cable (for example 02 = 2 m) / m, cable material PVC
- 00PUR specify length of cable (for example 02 = 2 m) / m, cable material PUR
- 00S specify length of cable (for example 02 = 2 m) / m, cable material silicone

electrical connection

- ST standard version without grouting
- VG fully encapsulated electronics in connection area

length of 1-rod

- A2 2 mm length of rod
- AXX length of rod (XX=length in mm)

length of 2-rod

- B2 2 mm length of rod
- BXX length of rod (XX=length in mm)

design of rod

- A 4 mm rod without coating
- B 4 mm rod with teflon coating

optional

- NA1 with level evaluate modul Typ NA1 (only with head...-22)
- NA2 with level evaluate modul Typ NA2 (only with head...-22)

updated 01/2018